

# 6x3 All-In-One Presentation Switchers (Multi-Format, HDMI Inputs)

DVX-2150HD-SP (FG1905-11) 2x25W 8-Ohm

DVX-2150HD-T (FG1905-13) 75W 70/100V



## Overview

The Enova® DVX-2150HD is an all-in-one controller, AV matrix switcher, scaler, analog to digital signal converter, twisted pair transmitter and amplifier with built-in professional grade audio processing. Easily integrate HDCP into system designs and enjoy hassle free plug-and-play operation. No tools, no delays, and no key constraints - it just works with AMX's exclusive InstaGate Pro® Technology. Designed to simplify system design and provide a future proof solution, the DVX-2150HD's multi-format video inputs support analog and digital signals including HDMI with HDCP sources - all in the same connector. The state-of-the-art professional grade audio DSP delivers quality audio throughout a room. Built-in SmartScale® Technology outputs video that is perfectly scaled for each connected display, eliminating the integration challenges that can occur when sources and displays have different optimal resolutions - making the DVX-2150HD easy to specify, easy to install and easy to use.

## Common Applications

Ideal All-In-One Presentation Switcher designed to dramatically simplify AV control and distribution in small to medium conference rooms, classrooms and auditoriums. The flexible DVX-2150HD is perfect for any room with a mix of analog and digital sources, multiple displays, or rooms that require support for video conferencing.

## Features

- **All-In-One Presentation Switcher in a 3RU Box** – Controller, matrix switcher, scaler, analog to digital converter, amplifier, plus twisted pair distribution and professional-grade audio DSP

- **HDMI/HDCP Switching with Simplicity of Analog** – End-to-end distribution of HDMI/HDCP without interruption or key constraints using InstaGate Pro Technology
- **Matrix Switching** – Freely route any input to any or all outputs without blocking – 6x3 video switcher and 8x3 audio switcher with audio breakaway
- **SmartScale Technology** – Automatically responds to the display's declared EDID information and scales the video to the best resolution and video parameters for that display without manual setup; this prevents inferior video quality when sources are forced to lower resolutions to support the least capable display in the system
- **AV and Control Over Twisted Pair** – Send audio, video, bi-directional control and Ethernet up to 100m over one standard twisted pair cable
- **Analog to Digital Video Conversion With Scaled Outputs** – Converts any source signal to digital and uses SmartScale Technology to automatically output video that is perfectly scaled for each connected display
- **Game Changing Device** – Standardizing on this box reduces Total Cost of Ownership

#### Dealer Benefits

- **HDCP Made Easy as Analog** - No more time-consuming, cumbersome work-around tools to address HDCP key caching and resolution incompatibilities
- **Fully Integrated Solution** – All-in-one design simplifies system design, reduces programming time, and saves time and effort in installation
- **Professional Grade Audio** – Simplifies installation with built-in DSP, eliminating the need for an external audio processor

#### Customer Benefits

- **Reduce Costs and Save Space** – Realize significant cost savings and space savings with the DVX-2150's all-in-one-design compared to purchasing individual components
- **Picture Perfect with No Delay** – Delivers clean, crisp digital video to any display immediately upon request
- **Designed with Flexibility For the Future** - Built for today's AV needs, but ready for tomorrow's future advanced needs including 3D video and surround sound

#### Additional Features

- **All-In-One Presentation Switcher** – Replaces the need for numerous individual components and equipment, allowing installers to save time and effort in configuring and programming
- **InstaGate Pro Technology** – Easily integrate HDCP into system designs and enjoy hassle-free matrix switching to all compliant displays; no tools, no delays, and no key constraints – it just works
- **Multi-Format Ports** – Built for analog signals - RGBHV, Component, S-Video, and Composite, and digital HDMI/HDCP and DVI signals - all on the same connector
- **Built-in Professional Grade Audio DSP** – Integrated digital signal processor's advanced capabilities, like independent 10-band parametric EQ, independent input gain adjustments and variable compression, allow precision tuning to match unique source and room attributes
- **3D Support** - Pass through latest video formats including 3D and Deep Color
- **Surround Sound Support** - Pass through high definition surround sound including DTS-HD and Dolby TrueHD
- **DXLink™ Twisted Pair Output** - Send audio, video, bi-directional control, Ethernet and power to remote destinations up to 100m away over one twisted pair cable – for details and helpful cabling information, reference the white paper titled [Cabling for Success with DXLink](#), or contact your AMX representative
- **Audio Breakaway** - Stereo audio from any analog input or de-embedded from any HDMI input can be broken away from its associated video, processed through the DSP, and switched independently to any analog, HDMI or S/PDIF audio output
- **Audio Matrix Switching** – Three independently switched and processed audio paths provide four unique volume, EQ, ducking and mixing configurations for perfectly tuned room audio as well as integration with audio/video conferencing, induction loop systems, voice re-enforcement speakers and audio recording devices
- **Enhanced Microphone Processing** – Independent 3-band parametric EQ, compression, gathering, auto-ducking, and limiting on each microphone input ensures crystal clear communication
- **HDCP Compliant**

## Specifications

GENERAL	
Enclosure	Metal with black matte finish
Dimensions (HWD)	5 3/16" x 17" x 14" (13.2 cm x 43.2 cm x 35.6 cm)
Weight	18.3 lb. (8.31 Kg)
Certifications	RoHS/WEEE compliant FCC Part 15 Class A IC CISPR 22 Class A C-Tick CISPR 22 Class A CE EN 55022, EN 55024 and EN 60065 LVD EN 60950-1 IEC 60065 UL 60065
Included Accessories	<ul style="list-style-type: none"> <li>• 1 CC-NIRC, IR Emitter w/3.5mm Phoenix (FG10-000-11)</li> <li>• 1 CC-DVIM-VGAF, DVI to VGA Adapter (FG10-2170-13)</li> <li>• (2) Front Rack Mounting Brackets (62-1905-16 and 62-1905-17)</li> <li>• Enova DVX-2150HD All-In-One Presentation Switcher Installation Guide</li> </ul>
Optional Accessories	<ul style="list-style-type: none"> <li>• CC-DVI-5BNM, DVI to 5 BNC Male Cable (FG10-2170-08)</li> <li>• CC-DVI-RCA3M, DVI to 3 RCA Male Cable (FG10-2170-09)</li> <li>• CC-DVIM-VGAF, DVI to HD-15 Female Adapter (FG10-2170-13)</li> <li>• CC-DVI-SVID, DVI to S-Video Cable (FG10-2170-10)</li> <li>• CC-3.5ST5-RCA2F, 5-pin 3.5mm Phoenix to 2 RCA Female Cable (FG10-003-20)</li> <li>• AVB-RX-DXLINK-HDMI, DXLink HDMI Receiver Module (FG1010-500)</li> <li>• EXB-IRS4, ICSLan IR/S Interface, 4 IR/S and 4 Inputs (FG2100-23)</li> <li>• EXB-COM2, ICSLan Serial Interface, 2 Ports (FG2100-22)</li> <li>• EXB-REL8, ICSLan Relay Interface, 8 Channels (FG2100-20)</li> <li>• EXB-I/O8, ICSLan Input/Output Interface, 8 Channels (FG2100-21)</li> <li>• EXB-MP1, ICSLan Multi-Port, 1 COM, 1 IR/S, 2 I/O, 1 IR RX (FG2100-26)</li> <li>• CBL-HDMI-FL HDMI, High Speed Flat Cable with RedMere® Technology (FG10-2180-16)</li> <li>• CBL-DP-FL, DisplayPort High Speed Flat Cable with RedMere Technology (FG10-2181-16)</li> <li>• CBL-ETH-FL, Ethernet Cat5e Flat Cable (FG10-2182-16)</li> <li>• CBL-RGB+A-FL RGB with Audio Flat Cable (FG10-2183-16)</li> </ul>

ACTIVE POWER REQUIREMENTS	
Power Consumption	80 Watts typical without amplifier 85 to 90 Watts typical average with amplifier 30 Watts typical in low-power mode
Power Connector	IEC Power Cord Connector 100-240 VAC

	47-63 Hz
Voltage AC (Typical)	110-240V, 47/63 Hz AC supply
Power Factor Correction (PFC)	Supported, complies with N60555-2 and EN61000-3-2

ENVIRONMENTAL	
Temperature (Operating)	0° C to 40° C (32° F to 104° F)
Temperature (Storage)	-10° C to 70° C (14° F to 158° F)
Humidity (Operating)	5% to 85% RH
Heat Dissipation (Typical)	300 BTU/hr
Heat Dissipation (Standby)	200 BTU/hr

ETHERNET	
Connection	(1) RJ-45
Description	10/100 Port RJ-45 connector provides TCP/IP communication. This is an Auto MDI/MDI-X enabled port, which allows you to use either straight-through or crossover Ethernet cables. The Ethernet Port LEDs show communication activity, connection status, speeds, and mode information
Link/Act Indicator	Link/Activity LED (green) blinks when receiving Ethernet data packets, one on Ethernet RJ-45 connector and one on the front panel
Speed Indicator	Speed LED (yellow) lights On when the connection speed is 100 Mbps Ethernet connection and turns OFF when the speed is 10 Mbps

INTEGRATED AMPLIFIER	
Integrated Amplifier	DVX-2150HD-SP: 2 x 25 W RMS into 8 Ohms Class D stereo amplifier (4-ohm stable) DVX-2150HD-T: 75 W, 70 V / 100 V mono amplifier

ONBOARD MASTER	
Controller	Integrated Controller is the equivalent of a NetLink NI-2100 Central Controller
Memory	256 MB SDRAM 1 MB Non-volatile (NV) SRAM 256 MB FLASH
Program Port	(1) DB-9 connector that supports RS-232 communications to a PC for system configuration and diagnostics
Configuration Dip Switch	8-position Master configuration DIP switch allows setting the Serial Programming port baud rate and onboard Master execution mode (PRD or normal)
ID Pushbutton	Black ID pushbutton sets the NetLink Device ID assignments of the Internal Control Device. It has no effect on the Internal Switcher Device
Status Indicator	Status LED (green) blinks to indicate that the system is programmed and communicating properly
Input Indicator	Input LED (yellow) blinks to indicate that the Controller is receiving data
Output Indicator	Output LED (red) blinks to indicate that the Controller is transmitting data

CONTROL PORTS & INDICATORS	
AxLink Port	(1) AxLink Port: 1 3.5 mm captive-wire connector provides data and power to external control devices
AxLink Indicator	(1) AxLink LED (green) indicates the state of the AxLink port
I/O Channels	(1) 6-Pin 3.5 mm (female) captive-wire connector 4-channel binary I/O port for contact closure with each input being capable of voltage sensing NetLinx Port 9 Channels 1-4
I/O Indicator	(4) LEDs (yellow) indicate that one or more of the I/O channels (1-4) are active
IR/Serial	(4) 8-pin 3.5 mm (female) captive-wire connector 4 IR Transmit / 1-way Serial ports NetLinx Ports 5-8 Supports high-frequency carriers up to 1.142 MHz 4 IR/Serial data signals can be generated simultaneously
IR/Serial Indicators	(4) LEDs (red) indicate that one or more of the IR/Serial ports (1-4) are transmitting control data
Relays	(4) single-pole, single-throw relays (1) 8-pin 3.5 mm (female) captive-wire connector NetLinx Port 4 Channels 1-4 Each relay can switch up to 24 VDC or 28 VAC @ 1 A Each relay is independently controlled
Relay Indicators	(4) LEDs (red) indicate that one or more of the relay channels (1-4) are active (closed)
RS-232/422/485 Ports	(3) bi-directional RS-232/422/485 serial ports (3) DB-9 Male Connectors NetLinx Ports 1-3 XON/XOFF (transmit on / transmit off) CTS/RTS (clear to send/ready to send) 300 - 115,200 baud
RS-232/422/485 Indicators	(3) sets of LEDs (red/yellow) indicate that RS-232/422/485 Ports (1-3) are transmitting or receiving data

INTEGRATED MATRIX SWITCHER CONTROL	
Switch Pushbutton	Press to enter the SWITCH menu on the LCD display. Choose to switch audio, video or both from any input to any output. Press the TAKE pushbutton to implement the switch
Take Pushbutton	While in the SWITCH menu, press to implement an audio/video switch. When not in the SWITCH menu, press to cycle through audio and/or video inputs
LCD Display	Liquid crystal display (2 lines with 20 characters per line) indicates current volume level and displays the Video, Audio, and Tools menus
Video Menu Pushbutton	Press to access the Video menu on the LCD display. Multiple presses cycle through the various VIDEO menus
Audio Menu Pushbutton	Press to access the Audio menu on the LCD display. Multiple presses cycle through the various AUDIO menus
Navigation Pushbuttons	(4) directional buttons for navigating the options in the Video and Audio menu (on the LCD display)

Status Pushbutton	Press to access the STATUS menu on the LCD display
Exit Pushbutton	Press to exit any menu
Video Mute Pushbutton	Press to mute/un-mute (enable/disable) all video output displays. Video Mute results in a blank screen on the output display
Audio Mute Pushbutton	Press to mute/un-mute all audio outputs

INTEGRATED MATRIX SWITCHER	
Video Switching	6 x 3 Matrix Video Switching, any of the 6 inputs can be routed to any or all of the 3 video outputs
Video Inputs	(2) Multi-Format DVI-I; supports HDMI/HDCEP, DVI, RGB, S-Video, Composite, Component (Y/Pb/Pr) (4) HDMI; supports HDMI/HDCEP
Video Outputs	(2) HDMI; supports HDMI/HDCEP (1) DXLink; supports digital video, audio, Ethernet, bi-directional control and power
Video Resolution Support	Supports resolutions up to 1920 x 1200 @ 60Hz. See Operations Reference Guide for details for each signal type
Progressive Resolution Support	480p up to 1920x1200 @ 60 Hz If input is interlaced, all scaled outputs will deinterlace video to a progressive resolution format. If in scaler Bypass mode interlaced input will pass through unaltered
HDCEP Support	Yes, full matrix HDCEP support (includes any input to any or all outputs) Key Management System AMX HDCEP InstaGate Pro Technology Key support up to 16 sinks per output, independent of source device
EDID Management	A preferred EDID can be selected for each input or any display EDID can be mirrored to any input independently
Audio Switching	8 x 3 Matrix Audio Switching. Each of the 3 audio outputs has independent volume, EQ, ducking, sync delay and mixing. Any of the 3 audio paths can be routed to any analog, HDMI or S/PDIF output
Audio Inputs	(2) female 1/8" stereo mini-phono jacks; support unbalanced audio (2) 3.5 mm 5-position captive-wire terminals; support balanced (differential) or unbalanced (single-ended) stereo audio (2) 3.5 mm 3-pin captive-wire MIC connectors; supports up to two mono microphones, unbalanced or balanced audio (4) HDMI connections support digital audio
Audio Outputs	DVX-2150HD-SP (FG1905-11): (1) Amplified audio output; 4-position captive wire connector; supports amplified, variable, mono or stereo audio (2) Line level audio output; supports balanced or unbalanced mono or stereo (1) S/PDIF output; mirrors any of the 3 analog audio outputs, 2 HDMI outputs or DXLink output (2) HDMI connections support digital versions of analog audio or direct pass-through audio (1) DXLink support digital version of analog audio or direct pass-through

	<p>DVX-2150HD-T (FG1905-13):</p> <p>(1) Amplified audio output; 2-position captive wire connectors; supports 70 V or 100 V mono audio – connect a speaker to either but not both simultaneously</p> <p>(2) Line level audio output; supports balanced or unbalanced mono or stereo</p> <p>(1) S/PDIF output; mirrors any of the 3 analog audio outputs, 2 HDMI outputs or DXLink output</p> <p>(2) HDMI connections support digital versions of analog audio or direct pass-through audio</p> <p>(1) DXLink support digital version of analog audio or direct pass-through</p>
Audio Breakaway	Yes, stereo audio from any input can be embedded to or de-embedded from its associated video, processed through DSP, and switched independently to any analog, HDMI or DXLink output (and picked up by the S/PDIF output which mirrors one of the others)

MULTI-FORMAT VIDEO WITH DVI-I	
Multi-Format Input Connections	(2) DVI-I; Ports (1-2)
Multi-Format Supported Video	<p>HDMI/HDCP, DVI/HDCP, RGB, S-Video, Composite, Component (Y/Pb/Pr)</p> <p>See specifications for each signal style over DVI-I for more detail</p>
Pixel Clock (Max)	165 MHz (225 MHz in pass-thru mode up to 1080p)
Input Equalization	Yes
Input Re-Clocking (CDR)	Yes

COMPONENT (Y/Pb/Pr) WITH DVI-I	
Input Level	1 Vp-p nominal
Input Impedance	75 Ohms, nominal
Note	<p>Requires DVI-I to 3 RCA Adapter or DVI-I to 5 BNC Adapter</p> <p>AC coupled: Insensitive to DC offset</p>

S-VIDEO WITH DVI-I	
Input Level	1 Vp-p nominal
Input Impedance	75 Ohms, nominal
Note	<p>Requires DVI-I to S-Video Adapter</p> <p>AC coupled: Insensitive to DC offset</p>

COMPOSITE WITH DVI-I	
Input Level	1 Vp-p nominal
Input Impedance	75 Ohms, nominal
Note	<p>Requires DVI-I to 3 RCA Adapter or DVI-I to 5 BNC Adapter</p> <p>AC coupled: Insensitive to DC offset</p>

RGBHV WITH DVI-I	
Supported Video	RGBHV, RGBS, RGsB
Input Level	1 Vp-p nominal
Input Impedance	75 Ohms, nominal
Sync Input Level	2 to 5 Vp-p
Sync Input Impedance	2.5 pF Typical, 10pF Maximum
Note	Requires DVI to HD-15 Adapter or DVI-I to 5 BNC Adapter

DVI WITH DVI-I	
Supported Video	DVI 1.0
Sync Input Level	2 to 5 Vp-p
Sync Input Impedance	2.5 pF Typical, 10pF Maximum
Note	Format: RGB

HDMI WITH DVI-I	
HDCP Compliance	Yes
Note	Requires DVI to HDMI Adapter  Signal Types: Supports full matrix switching, video processing and scaling of 8 bit per color standard Input video signals. Supports full matrix switching and pass-thru of all HDMI compliant video signals including 3-D and Deep Color

HDMI WITH HDMI Type A Female	
Input Connections	(4) HDMI Type A Female, Ports (3-6)
Input Signal Type Support	HDMI/HDCP, DVI/HDCP, DisplayPort ++
Data Rate (Max)	4.95 Gbps (6.75 Gbps in passthru mode up to 1080p)
Pixel Clock (Max)	165 MHz (225 MHz in passthru mode up to 1080p)
Input Equalization	Yes
Input Re-Clocking (CDR)	Yes
Output Connections	(2) HDMI Type A Female, Ports (1-2)
Output Signal Type Support	HDMI/HDCP, DVI/HDCP
Output Scaling	SmartScale or Manual Configuration or Bypass SmartScale output resolution support: All resolutions between 480p and 1920 x 1200 @ 60 Hz via automatic SmartScale query of the display's declared EDID Detailed Timing Definition
Deep Color Support	Scaled Outputs: 24-bit, Passthru Outputs: 30-bit, 36-bit
Color Space Support	Y,Cb,Cr & RGB
3D Format Support	Yes, when in Bypass mode, HDMI primary formats
HDCP Compliance	Yes
Audio Format Support for HDMI	Supports Dolby TrueHD, Dolby Digital, DTS-HD Master Audio, DTS, L-PCM
Note	DisplayPort ++ requires DisplayPort to HDMI adapter cable  Supports full matrix switching, video processing and scaling of 8 bit per color standard Input video signals.  Supports full matrix switching and pass-thru of all HDMI compliant video signals including 3-D and Deep



	<p>Color</p> <p>Each output can deliver processed and scaled video or pass-thru video from any video input</p> <p>Each output can embed audio from any of the 3 analog audio outputs as Stereo L-PCM or can pass-thru Dolby TrueHD, Dolby Digital, DTS-HD Master Audio, DTS and L-PCM audio from the selected video source</p>
--	--

DXLINK WITH RJ-45	
Output Connections	(1) RJ-45; Port (3)
Output Compatible Formats	<p>Digital Video with embedded audio, analog audio, Ethernet, Bi directional control</p> <p>Supports full matrix switching and pass-thru of all HDMI compliant video signals including 3-D and Deep Color</p> <p>Audio Signal Types: Supports Dolby TrueHD, Dolby Digital, DTS-HD Master Audio, DTS, L-PCM</p>
Output Re-Clocking	Yes
Output Scaling	SmartScale or Manual Configuration or Bypass
HDCP Support	Yes
Twisted Pair Cable Type	<p>Shielded Cat6, Cat6A and Cat7</p> <p><b>DXLink twisted pair cable runs for DXLink equipment shall only be run within a common building where a common building is defined as: the walls of the structure(s) are physically connected and the structure(s) share a single ground reference</b></p> <p>For more details and helpful cabling information, reference the white paper titled <a href="#">Cabling for Success with DXLink</a>, or contact your AMX representative</p>
Note	Supports full matrix switching, video processing and scaling of 8 bit per color standard Input video







ANALOG AUDIO	
Analog Audio Input Connections	<p>(2) female 1/8" stereo mini-phono jacks; support unbalanced audio</p> <p>(2) 3.5 mm 5-position captive-wire terminals; support balanced (differential) or unbalanced (single-ended) stereo audio</p>
Input Level (Nominal)	+4 dBu (1.228 Vrms) balanced or -10 dBV (0.3162 Vrms) unbalanced
Input Level (Maximum)	+14 dBu
Input Impedance	>17 KOhms balanced, >10 KOhms unbalanced
Analog Audio Output Connections	<p>DVX-2150HD-SP (FG1905-11):</p> <p>(1) Amplified audio output; 4-position captive wire connector; supports amplified, variable, mono or stereo audio</p> <p>(2) Line level audio output; supports balanced or unbalanced mono or stereo</p> <p>DVX-2150HD-T (FG1905-13):</p> <p>(1) Amplified audio output; 2-position captive wire connectors; supports 70V or 100V mono audio –</p>

	connect a speaker to either but not both simultaneously (2) Line level audio output; supports balanced or unbalanced mono or stereo
Volume Control	-100dB to +0dB in 1dB steps
Balance Control	20 steps each left and right
Output Level (Maximum)	+17 dBu (line level)
Output Impedance	200 Ohms (line level)
Audio Channel Crosstalk	Balanced Line Inputs: -98dB @ 0dBV, 20Hz to 20KHz Unbalanced Line Inputs: -70dB @ 0dBV, 20Hz to 20KHz
Audio Frequency Response	AMP: 20Hz to 20kHz $\pm 0.75$ dB @ 8 ohms Line: 20Hz to 20KHz $\pm 0.1$ dB
Audio Input Compression	Independent Compression per input Attack: 1 to 2000 ms Release: 10 to 5000 ms Compression Ratio: 1 to 20 Threshold: -60 to 0 dB
Audio Input Gain Compensation	-24 dB to +24 dB, 1 dB steps
Audio Output Equalizer	10-band parametric EQ with variable center frequency, filter type and Q per band Center Frequency: 20 Hz to 20 kHz EQ Gain: -12 to +12 dB Q: 0.1 to 20 Filter Types: Bell, Base Shelving, Treble Shelving, Low Pass, High Pass, Band Pass, Band Stop
Audio Output Sync Delay	0 to 200 ms
Audio S/N Ratio	AMP: 85 dB @ 8 Ohms, full output, 1 kHz A-weighted Line: 105dB @ 10dBV, AES17
Audio THD+N	AMP: < 0.15% @ 8 Ohms, 20 Watts, 20 Hz to 20 kHz Line: 0.003% @ 0 dBV, 1 kHz
Note	Independent EQ, Volume and Balance control per output

MICROPHONE AUDIO	
Microphone Input Connections	(2) 3.5 mm 3-pin captive-wire MIC connectors; supports up to two mono microphones, unbalanced or balanced audio
Microphone Input Level (Maximum)	5 dBu
Microphone Input Format Support	Line or Mic level, balanced or unbalanced audio
Microphone Input Impedance	3.5 kOhms, accepts 60 to 600 Ohms sources
Microphone Input Gain	-24 dB to +89 dB, 1dB steps
Microphone Input Equalizer	3-band parametric EQ with variable center frequency, filter type and Q Center Frequency: 20 Hz to 20 kHz EQ Gain per Band: -12 to +12 dB Q per band: 0.1 to 20 Filter Types: Bell, Base Shelving, Treble Shelving, Low Pass, High Pass, Band Pass, Band Stop
Microphone Input Compression	Independent Compression per Microphone Attack: 1 to 2000 ms Release: 10 to 5000 ms Compression Ratio: 1 to 20 Threshold: -60 to 0 dB
Microphone Gating	Independent Gating per Microphone Attack: 1 to 2000 ms Release: 10 to 5000 ms Depth: 0 to 20 dB

	Hold Off: 0 to 2000 ms Threshold: -60 to 0 dB
Microphone Limiter	Independent Limiting per Microphone Attack: 1 to 2000 ms Release: 10 to 5000 ms Threshold: -60 to 0 dB
Microphone Ducking	Independent Ducking per each of 3 audio paths Attack: 1 to 2000 ms Release: 10 to 5000 ms Attenuation: 0 to 20 dB Hold Off: 0 to 4000 ms Threshold: -60 to 0 dB
Microphone Inputs Note	Phantom Power: switchable 48 V to each microphone @ 8 mA total

<b>S/PDIF DIGITAL AUDIO</b>	
S/PDIF Audio Outputs	(1) S/PDIF output; mirrors either of the 3 analog audio outputs, 2 HDMI outputs or DXLink output
S/PDIF Audio Output Note	Output can mirror any of the 3 analog audio outputs as stereo digital audio, or L-PCM, Dolby Digital and DTS audio being passed-thru to any of the 2 HDMI outputs or 1 DXLink output

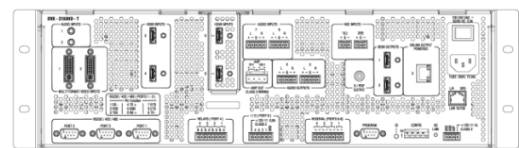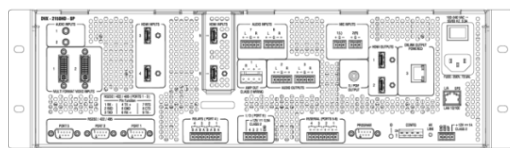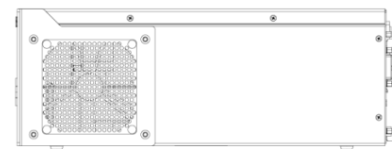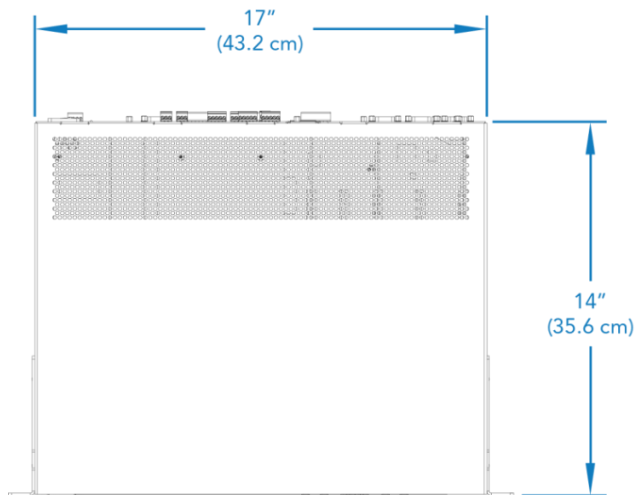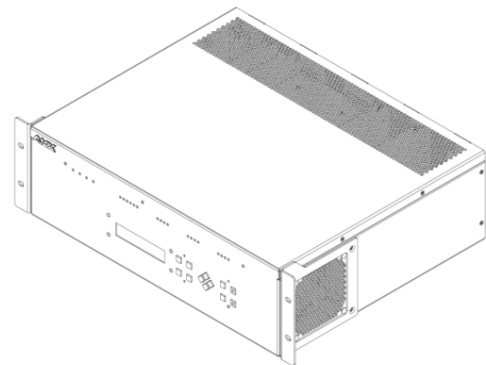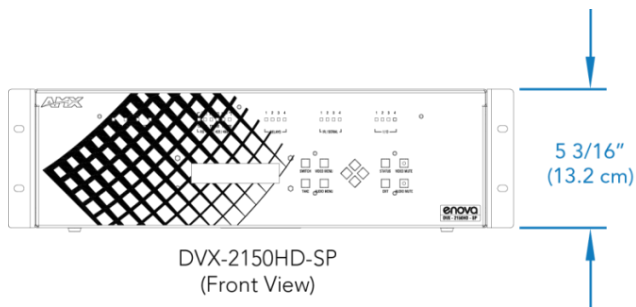

#### About AMX

AMX hardware and software solutions simplify the implementation, maintenance, and use of technology to create effective environments. With the increasing number of technologies and operating platforms at work and home, AMX solves the complexity of managing this technology with reliable, consistent and scalable systems. Our award-winning products span control and automation, system-wide switching and audio/video signal distribution, digital signage and technology management. They are implemented worldwide in conference rooms, homes, classrooms, network operation / command centers, hotels, entertainment venues, broadcast facilities, and more. ©2014 AMX. All rights reserved.

Specifications subject to change. Revised 1-April-2014.

AMX.com | 800.222.0193 | 469.624.8000 | +1.469.624.7400 | fax 469.624.7153